


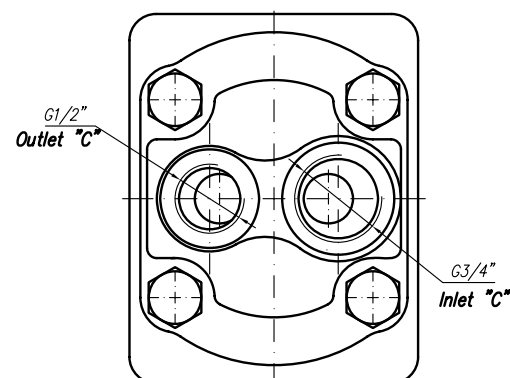

Type	Displacement	Flow		Pressure P _{nom}	max Speed n	Dimension							
		at 1500 rpm	at max rpm			Inlet			Outlet				
	cm ³ /rev	l/min	l/min	bar	rpm	A mm	B mm	M	G	G1	M	G	G1
20A(C)4,5X016W	4,5	6,14	14,33	250	3500		94	G3/4				G1/2	
20A(C)6,3X016W	6,3	8,69	20,29	250	3500		97						
20A(C)8,2X016W	8,2	11,32	26,40	250	3500		99,9						
20A(C)10X016W	10	13,95	32,55	250	3500		102,9						
20A(C)11X016W	11,3	15,76	36,78	250	3500		105						
20A(C)12X016W	12	16,92	39,48	250	3500		106,3						
20A(C)14X016W	14	19,95	46,55	250	3500		109,4						
20A(C)15X016W	15	21,60	36,00	250	2500		110,9						
20A(C)16X016W	16	23,04	38,40	250	2500		112,5						
20A(C)19X016W	19	27,36	45,60	200	2500		117,5						
20A(C)22X016W	22	31,68	42,24	180	2000		122,5						
20A(C)25X016W	25	36,00	48,00	160	2000		127,5						
20A(C)14X106WH	14	20,16	47,04	250	3500		119,7	G3/4				G1/2	
20A(C)15X016HW	15	21,60	43,20	250	3000		121,2						
20A(C)16X016HW	16	23,04	46,08	250	3000		122,8						
20A(C)17,3X016HV	17,3	24,91	49,82	230	3000		124,9						
20A(C)18,2X016HV	18,2	26,21	52,42	210	3000		126,5						
20A(C)19X016HW	19	27,36	54,72	200	3000		127,8						
20A(C)22X016HW	22	31,68	52,80	180	2500		132,8						
20A(C)25X016HW	25	36,00	60,00	160	2500		137,7						
20A(C)28X016HW	28	40,32	67,20	130	2500								
20A(C)32X016HW	32	46,08	61,44	120	2000								
20A(C)36X016HW	36	51,84	69,12	100	2000								